
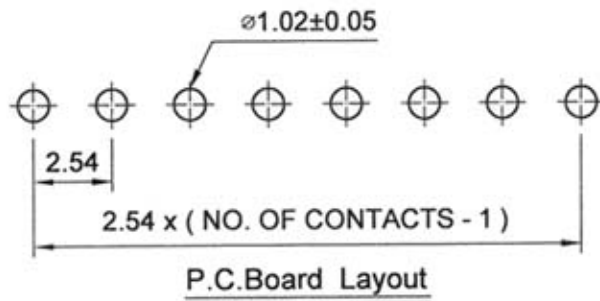
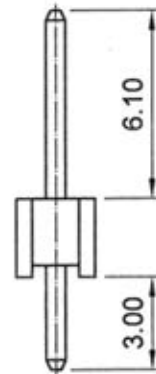


1 X 40 PIN wtyk prosty

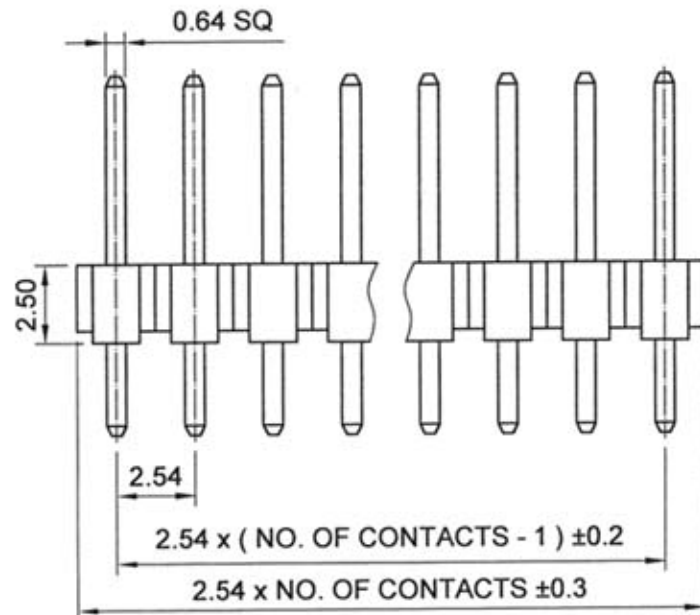

SPECIFICATIONS

CURRENT A & VOLATGE RATING : 3A & 25Vac MAX.

INSULATOR RESISTANCE : 5000 MΩ MIN.

DIELECTRIC WITHSTANDING : AC 500 V

OPERATING TEMPERATURE : -25°C ~ +85°C (P.B.T)

-40°C ~ +105°C (NYLON-6T)

MAX PROCESSING TEMP : 250°C FOR 3~5 SECONDS (NYLON-6T)

CONTACT MATERIAL : SEE ORDER INFORMATION

INSULATOR MATERIAL : SEE ORDER INFORMATION

FINISH : SEE ORDER INFORMATION